

PRODUCT INTRODUCTION


Infinity V-lux 28 is designed with a slim pole which supports the adjustable spot and makes this product to be ideal for creating accent lighting. The height of pole also can be customized. Thanks to its particular flexibility and adjustability, this 3-8°, 6-45° zoom spot is the ideal fixture for museums and high-end cabinets to show different exhibits.

SPECIFICATION


Wattage : 1W / 2W / 3W
 Color temperature : 2700K / 3000K / 3500K / 4000K
 CRI : Ra95 (R9>90)
 Beam angle : 3-8°
 Adjusted by zoom lens control device
 Driver : Input voltage DC3V 700mA(MAX)
 Dimming : 0/1-10V , DALI , TRIAC , CASAMBI

FEATURES



Product surface color : Silver, Black, Customized
 Rotatable through 350° on pole , 90° tilt
 Adaptor : Standing pole
 Protection degree : IP20 (En60598)
 Energy efficiency: EEIA




Radial distribution & Conical illuminance

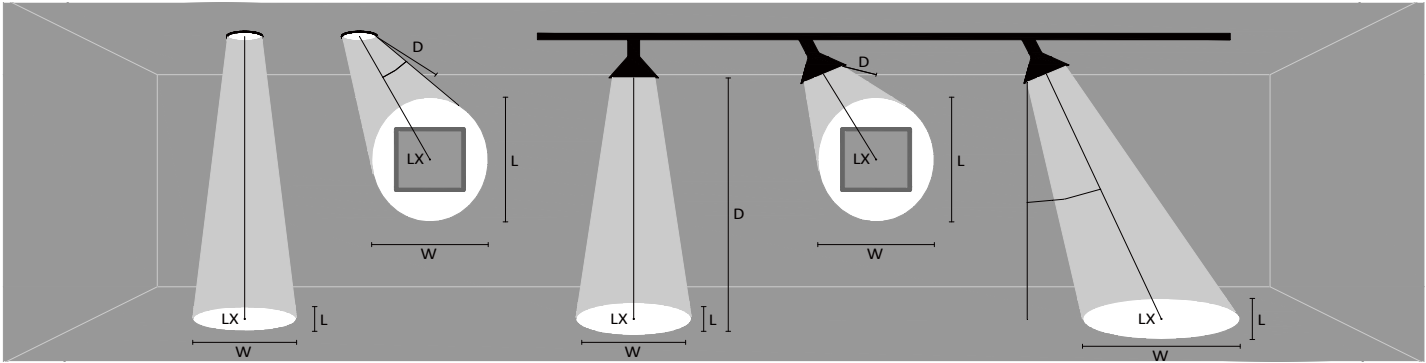

D Distance To Fix From Wall or Floor
LX Initial illuminance Level At Center of Bram
L Beam Length(where candlepower drops to 50% of maximun)
W Beam Width(where candlepower drops to 50% of maximun)

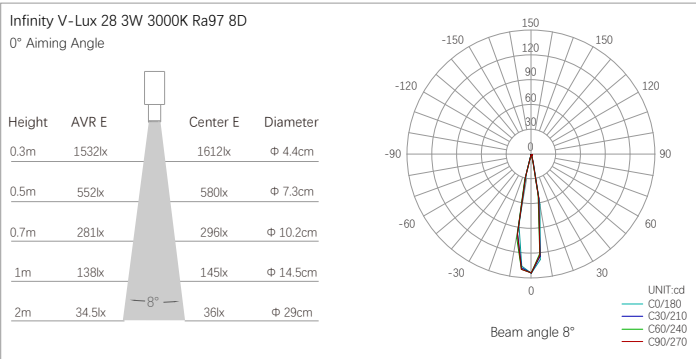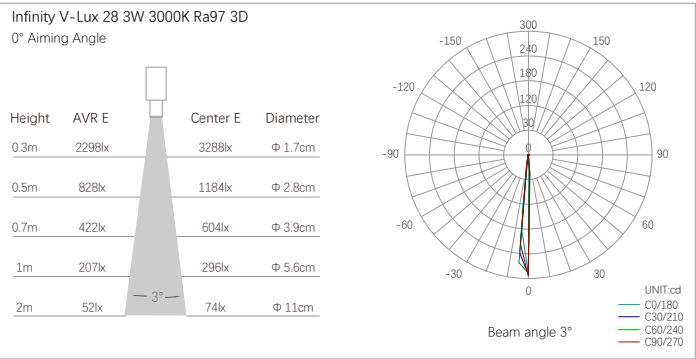

Lighting distribution

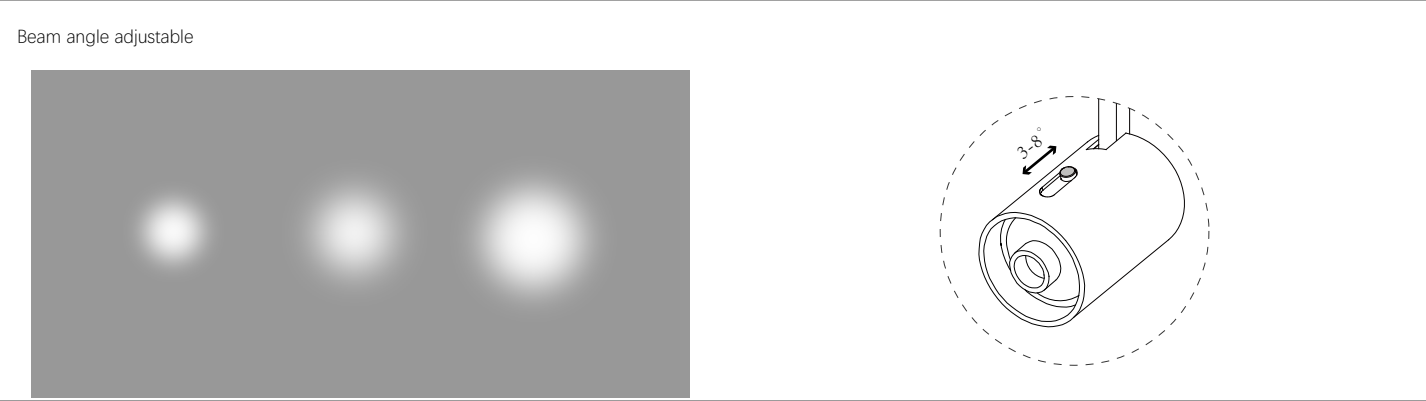

Specifications

Model No.	Total Power (W)	LED Power (W)	Voltage	CRI (Ra)	Corlor Temp (K)	LED Flux (lm)	Beam Angle	IP Grade
Infinity V-Lux 28	1	0.9	DC3V 700mA(MAX)	95	2700	100	3-8°	IP20
					3000	107		
					4000	114		
Infinity V-Lux 28	2	1.8			2700	130		
					3000	142		
					4000	155		
Infinity V-Lux 28	3	2.7			2700	200		
					3000	220		
					4000	230		

· Thermally stable typical lumens (±10%)

Package information

Model No.	Packaging/Unit	Pieces/Unit	Dimensions (L x W x H)	Gross Weight	Volume
Infinity V-Lux 28	Inner box	1	475x105x90mm	0.75kg	4.19dm³
	Outer box	20	490x555x390mm	16kg	106.06dm³

Optional accessories



Color coated lens