

PRODUCT INTRODUCTION


It features a very high color rendering index of CRI 98/95, which can highlight the special features of the items on display and catch the viewers' attention. There are ceiling and track installation with a long arm(customized length available) for choosing freely.

SPECIFICATION


Wattage : 3W / 5W / 7W
 Color temperature : 2700K / 3000K / 4000K
 CRI : Ra95 (R9>90)
 Beam angle : 6-45°
 Adjusted by zoom lens control device
 Driver : AC220-240V
 Dimming : 0/1-10V , DALI , TRIAC , CASAMBI

FEATURES




Product surface color : Silver, Black, Customized
 Rotatable through 365° on pole , 90° tilt
 Adaptor : Ceiling-mounted
 Protection degree : IP20 (En60598)
 Energy efficiency: EEIA




Radial distribution & Conical illuminance

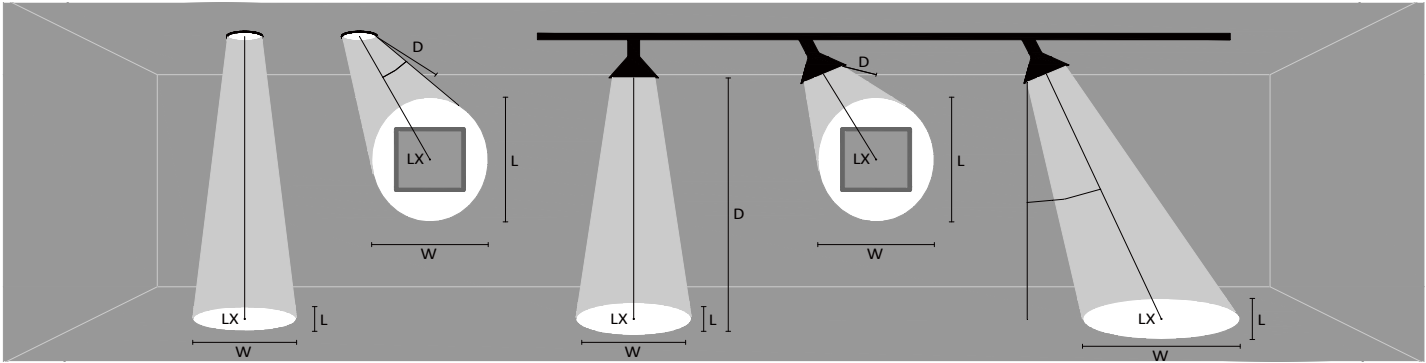


D Distance To Fix From Wall or Floor
LX Initial illuminance Level At Center of Bram
L Beam Length(where candlepower drops to 50% of maximun)
W Beam Width(where candlepower drops to 50% of maximun)

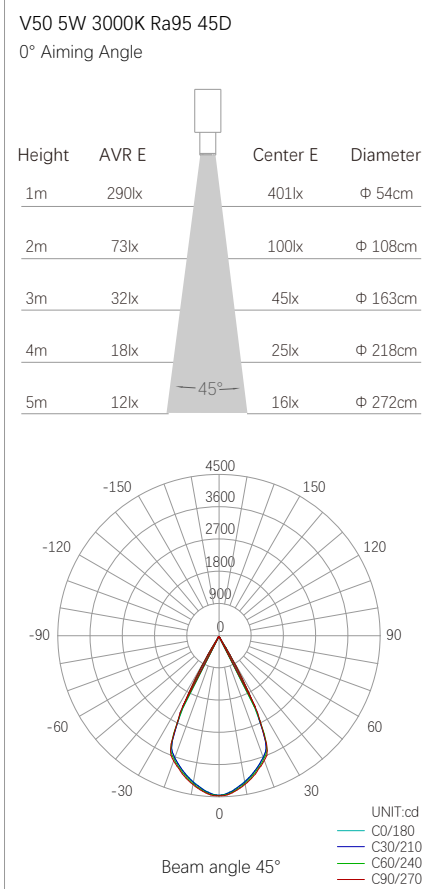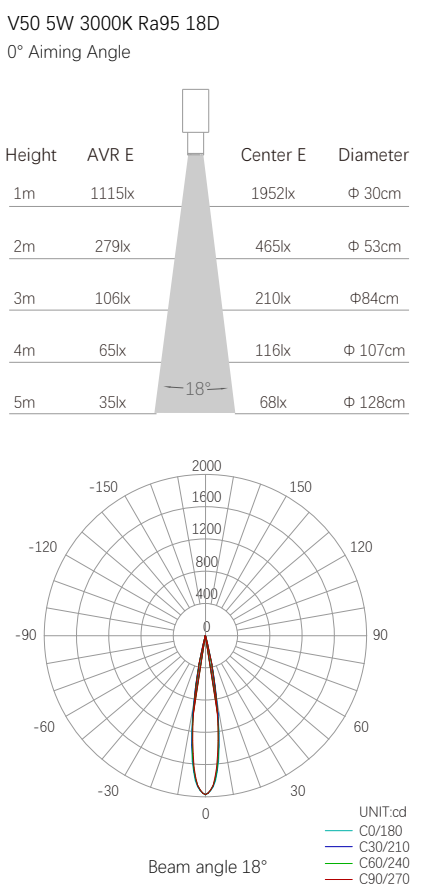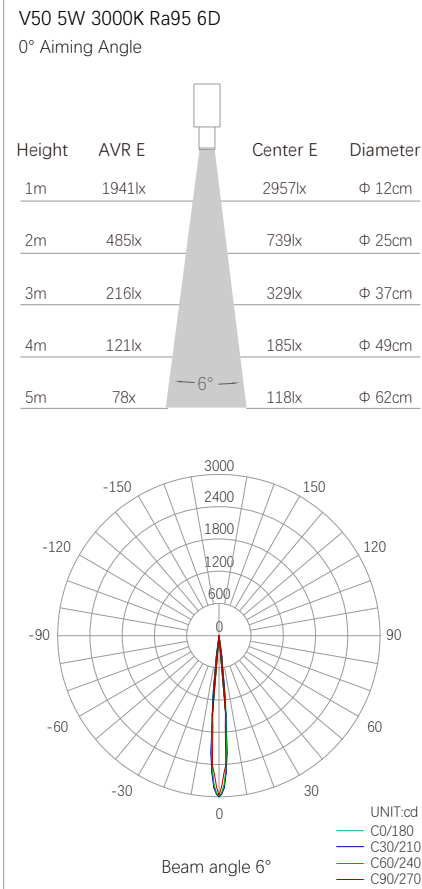

Lighting effect

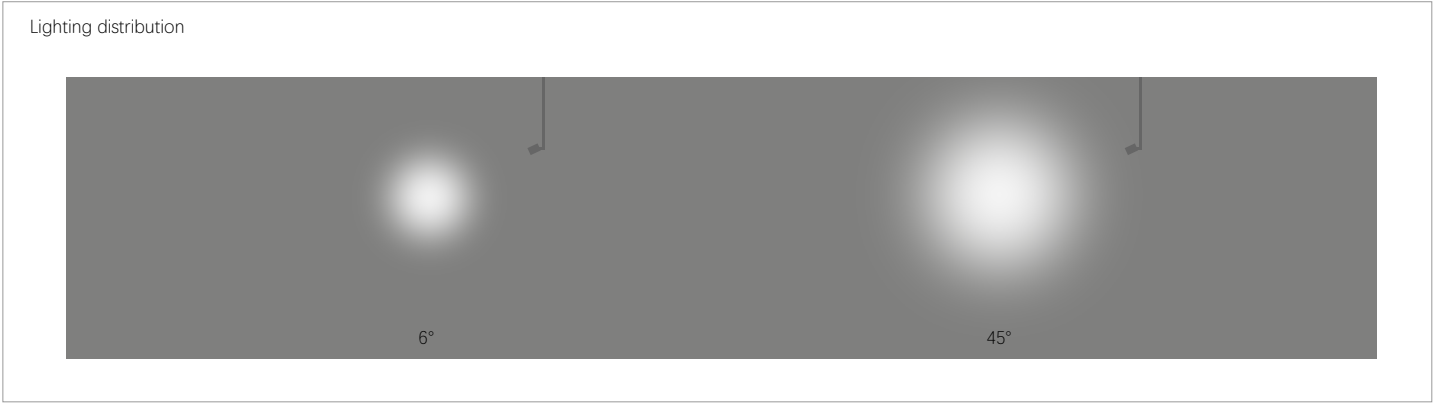

Beam angle adjustable





Specifications


Model No.	Total Power (W)	LED Power (W)	Voltage	CRI (Ra)	Corlor Temp (K)	LED Flux (lm)	Beam Angle	IP Grade
Infinity V50 Static	3	2.7	AC220V-240V	95	2700	200	6-45°	IP20
					3000	220		
					4000	230		
Infinity V50 Static	5	4.5			2700	390		
					3000	420		
					4000	430		
Infinity V50 Static	7	6.3			2700	506		
					3000	548		
					4000	562		

· Thermally stable typical lumens (±10%)

Package information

Model No.	Packaging/Unit	Pieces/Unit	Dimensions (L x W x H)	Gross Weight	Volume
Infinity V28 Static	Inner box	1	650x120x120mm	0.5kg	9.36dm³
	Outer box	16	680x500x500mm	10kg	170.00dm³

Optional accessories



Honeycomb louver



Color coated lens