


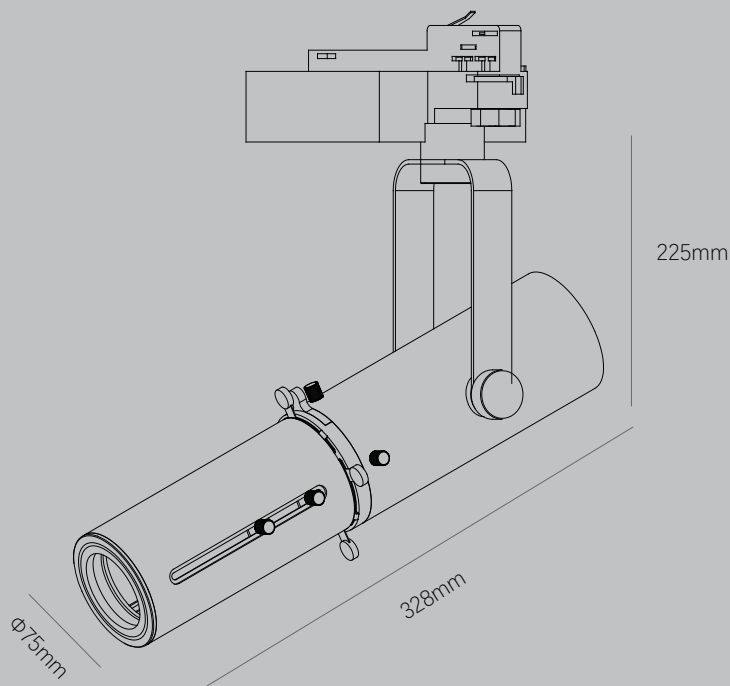

PRODUCT INTRODUCTION

Shooter, is the optimum accent lighting with wonderful lighting effect for museums, exhibitions, art galleries, residential environments, sales and showroom areas, etc..

It uses the framing accessory for sharp-edged and rectangular illumination of surface, the front button to adjust the sharpness and angle to suit the objects. Customized logos are available.

SPECIFICATION


Wattage : 24W / 30W
 Color temperature: 2700K / 3000K / 3500K / 4000K
 Tunable white 2700-5000K
 CRI : Ra97 (R9>90)
 Beam angle : 9~18° / 12~25° / 18~30° / 24~40°
 adjusted by zoom lens control device
 Driver : Input voltage 220-240V, PF>0.9
 Dimming : 0/1-10V , DALI , TRIAC , CASAMBI

FEATURES

Product surface color : black, white
 Bracket rotatable through 350° on adaptor, 270° tilt
 Adaptor : 3-circuit / ceiling-mounted
 Protection degree : IP20 (En60598)
 Energy efficiency: EEIA



Radial distribution & Conical illuminance

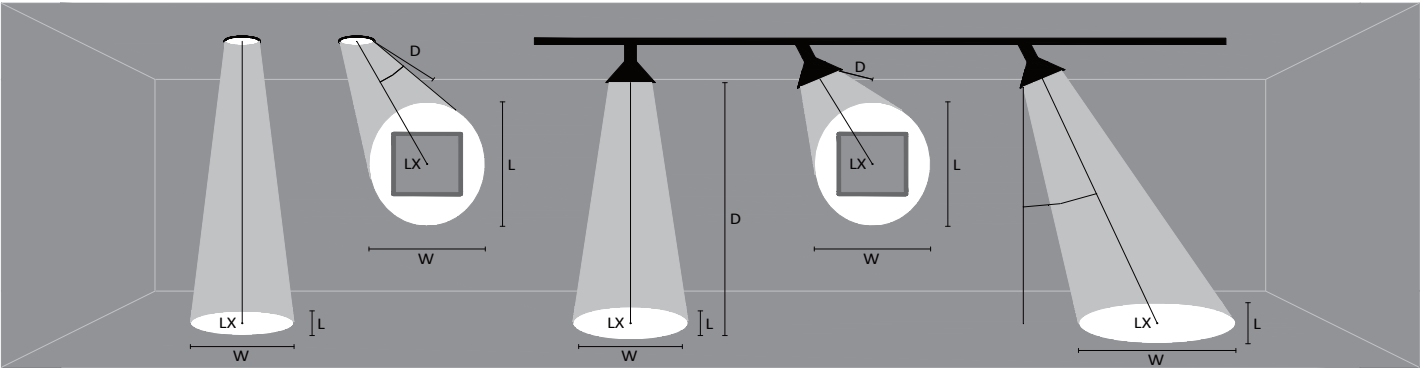

D Distance To Fix From Wall or Floor
LX Initial illuminance Level At Center of Bram
L Beam Length(where candlepower drops to 50% of maximun)
W Beam Width(where candlepower drops to 50% of maximun)

0° Aiming Angle				
Height	AVR E	Center E	Diameter	
1M	2092 Lux	5517 Lux	44CM	
2M	523 Lux	1379 Lux	89CM	
3M	233 Lux	613 Lux	133CM	
4M	131 Lux	345 Lux	177CM	

•Above data is only for TL0020 24W 3000K Ra97 25°, for further data please refer to specifications.

Lighting effect


Cut sheet

Beam angle adjustable

Direction adjustable


Customized gobo

Sharpness setting



20° 30° 45°

Dimmable



5° 50° 100°

0-100%

Specifications

Model No.	Total Power (W)	LED Power (W)	Voltage	CRI (Ra)	Color Temp (K)	LED Flux(lm)	Beam Angle	IP Grade
TL0020 24W Ra97	24	20.5	AC220-240V	97	2700	2640	9~18° 12~25° 18~30° 24~40°	IP20
				97	3000	2808		
				97	3500	2844		
				97	4000	2880		
TL0020 30W Ra97	30	27	AC220-240V	97	2700	3300		
				97	3000	3510		
				97	3500	3555		
				97	4000	3600		
TL0020-TW 18W	18	16	AC220-240V	>90	2700-5000	815-900		

• Thermally stable typical lumens (±10%)

Package information

Model No.	Packaging unit	Pieces/Unit	Dimensions (L x W x H)	Gross weight	Volume
TL0020	Inner box	1	385x305x150mm	2.5kg	17.61dm³
	Outer box	3	470x320x405mm	14kg	60.912dm³