


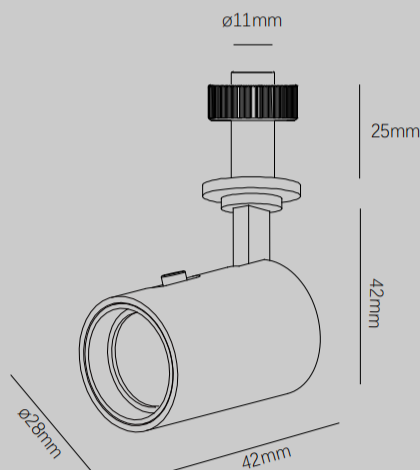

PRODUCT INTRODUCTION

Infinity V28 Acme is fixed with surface mounted style. It is flexible and easy to install. Thanks to its particular flexibility and adjustability, this 3-8°, 6-45° zoom spot is the ideal fixture for museums and high-end cabinets to show different exhibits.

SPECIFICATION

Wattage : 1W / 2W / 3W

Color temperature : 2700K / 3000K / 4000K

CRI : Ra95 (R9>90)

Beam angle : 6-45°

Adjusted by zoom lens control device

Driver : Input voltage DC3V 700mA(MAX)

Dimming : 0/1-10V , DALI , TRIAC , CASAMBI

FEATURES


Product surface color : Silver, Black, Customized

Rotatable through 365° on adaptor, 90° tilt


Mounting: Embedded

Protection degree : IP20 (En60598)



Energy efficiency: EEIA




Radial distribution & Conical illuminance

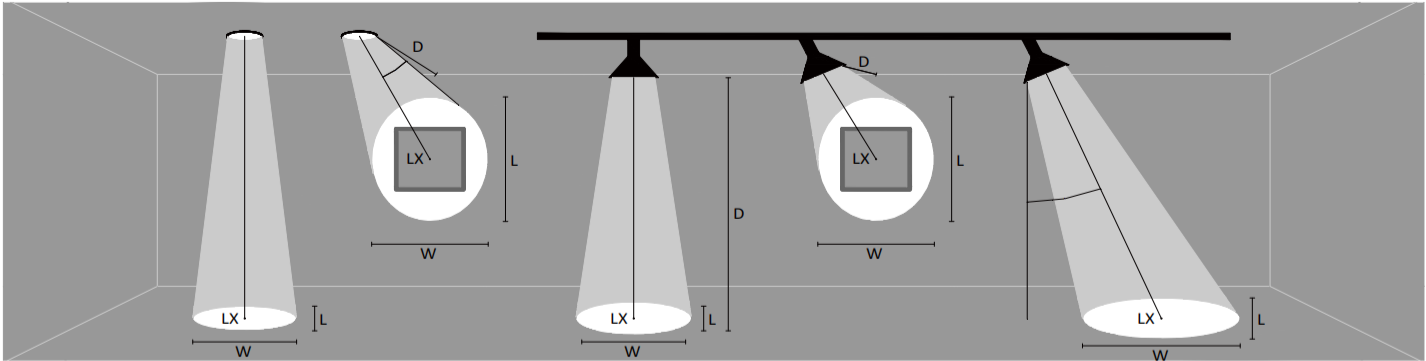

D Distance To Fix From Wall or Floor
LX Initial illuminance Level At Center of Beam
L Beam Length(where candlepower drops to 50% of maximum)
W Beam Width(where candlepower drops to 50% of maximum)

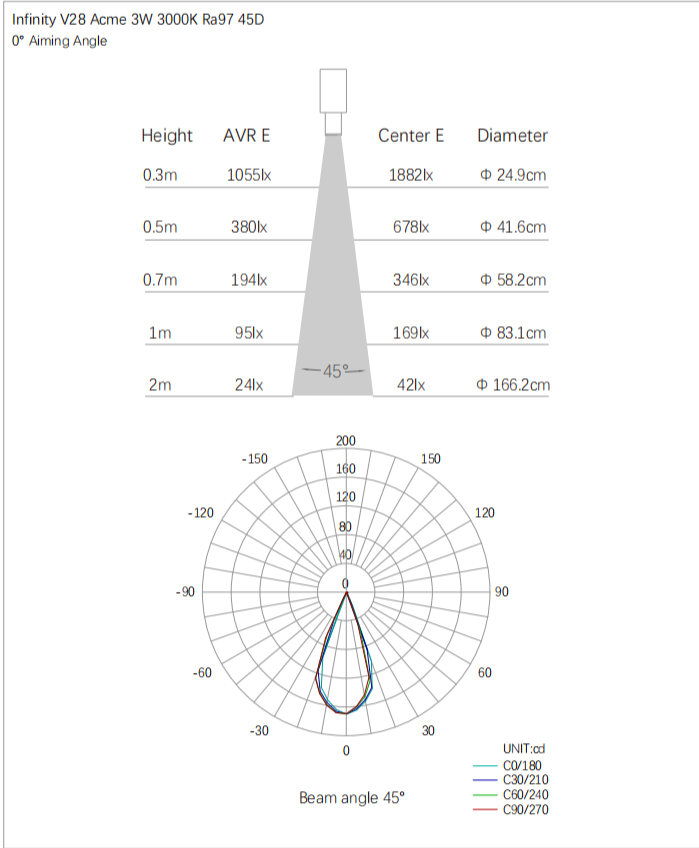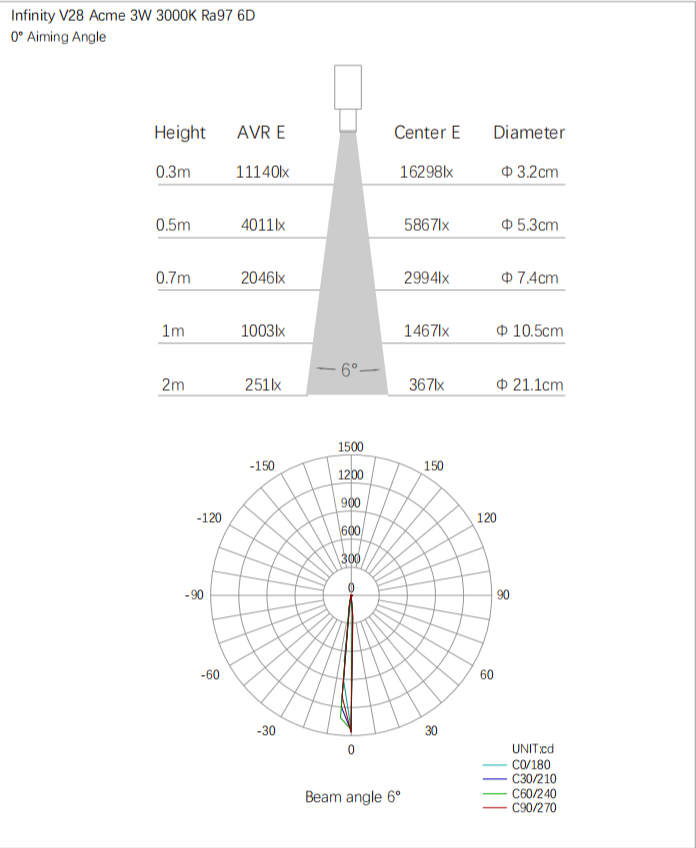

Lighting distribution

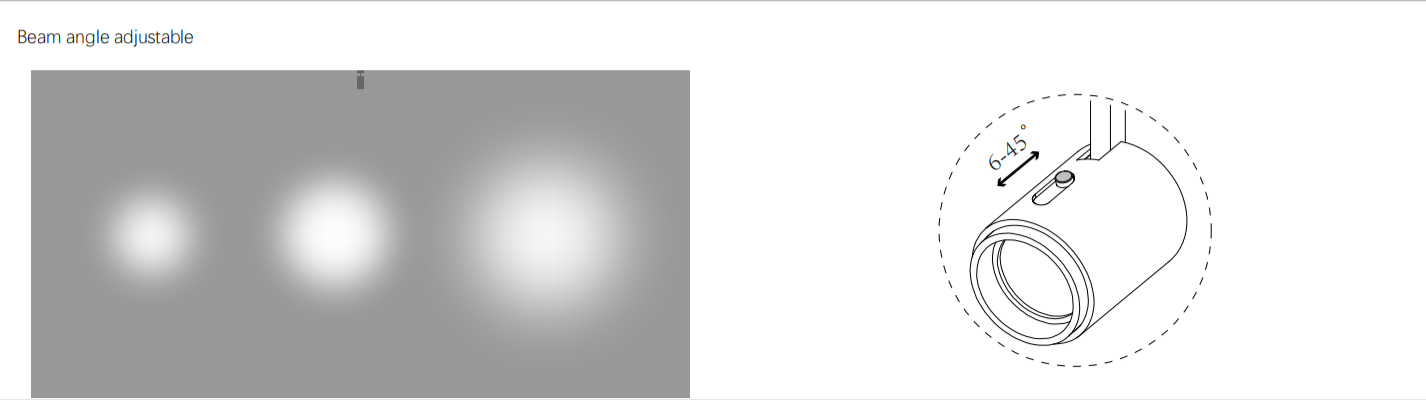

Specifications

Model No.	Total Power (W)	LED Power (W)	Voltage	CRI (Ra)	Corlor Temp (K)	LED Flux (lm)	Beam Angle	IP Grade
Infinity V28 Acme	1	0.9	DC3V 700mA(MAX)	95	2700	100	6-45°	IP20
					3000	107		
					4000	114		
Infinity V28 Acme	2	1.8			2700	130		
					3000	142		
					4000	155		
Infinity V28 Acme	3	2.7			2700	200		
					3000	220		
					4000	230		

· Thermally stable typical lumens (±10%)


Package information

Model No.	Packaging/Unit	Pieces/Unit	Dimensions (L x W x H)	Gross Weight	Volume
Infinity V28 Acme	Inner box	1	60x60x110mm	0.56kg	0.37dm³
	Outer box	50	330x330x250mm	29.5kg	27.23dm³

Optional accessories



Barn doors



Honeycomb louver



Color coated lens