


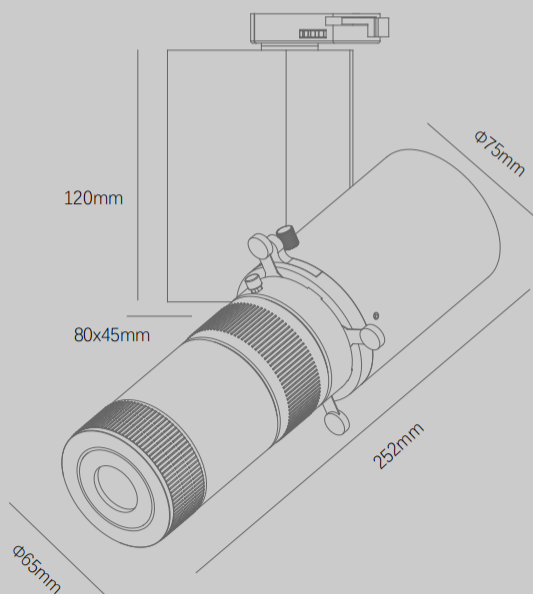

PRODUCT INTRODUCTION

Pixma, specially designed for museums, galleries, exhibitions, residential environments, sales and showroom areas etc. It produces an evenly illuminated "frame" for highlighting artwork, exhibits etc.

It uses the framing accessory for sharp-edged and rectangular illumination of surface, the front lens to adjust the sharpness and angle to suit the objects. Lens can be interchangeable for changing different angles. Neat and clear light cut makes the exhibits spectacular themselves.

SPECIFICATION

Wattage : 24W

Color temperature:

2700K / 3000K / 3500K / 4000K / 5000K

Tunable white

CRI : Ra97 (R9>90)

Beam angle : 9~18° / 12~25° / 18~30° / 24~40°

Adjusted by zoom lens control device

Driver : Input voltage 220-240V, PF>0.9

Dimming : 0/1-10V , DALI , TRIAC , CASAMBI

FEATURES

Product surface color : Black, White, Custom

Bracket rotatable through 365° on adaptor, 365° tilt


Adaptor : 3-circuit / ceiling-mounted

Protection degree : IP20 (En60598)

Energy efficiency: EEIA



Radial distribution & Conical illuminance

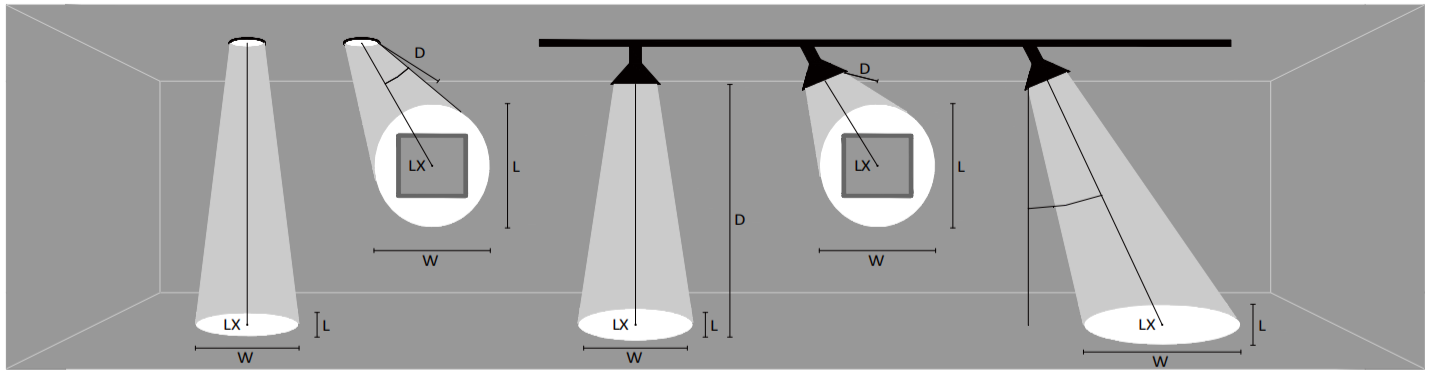


D Distance To Fix From Wall or Floor

LX Initial illuminance Level At Center of Beam

L Beam Length (where candlepower drops to 50% of maximum)


W Beam Width (where candlepower drops to 50% of maximum)

Radial distribution & Conical illuminance

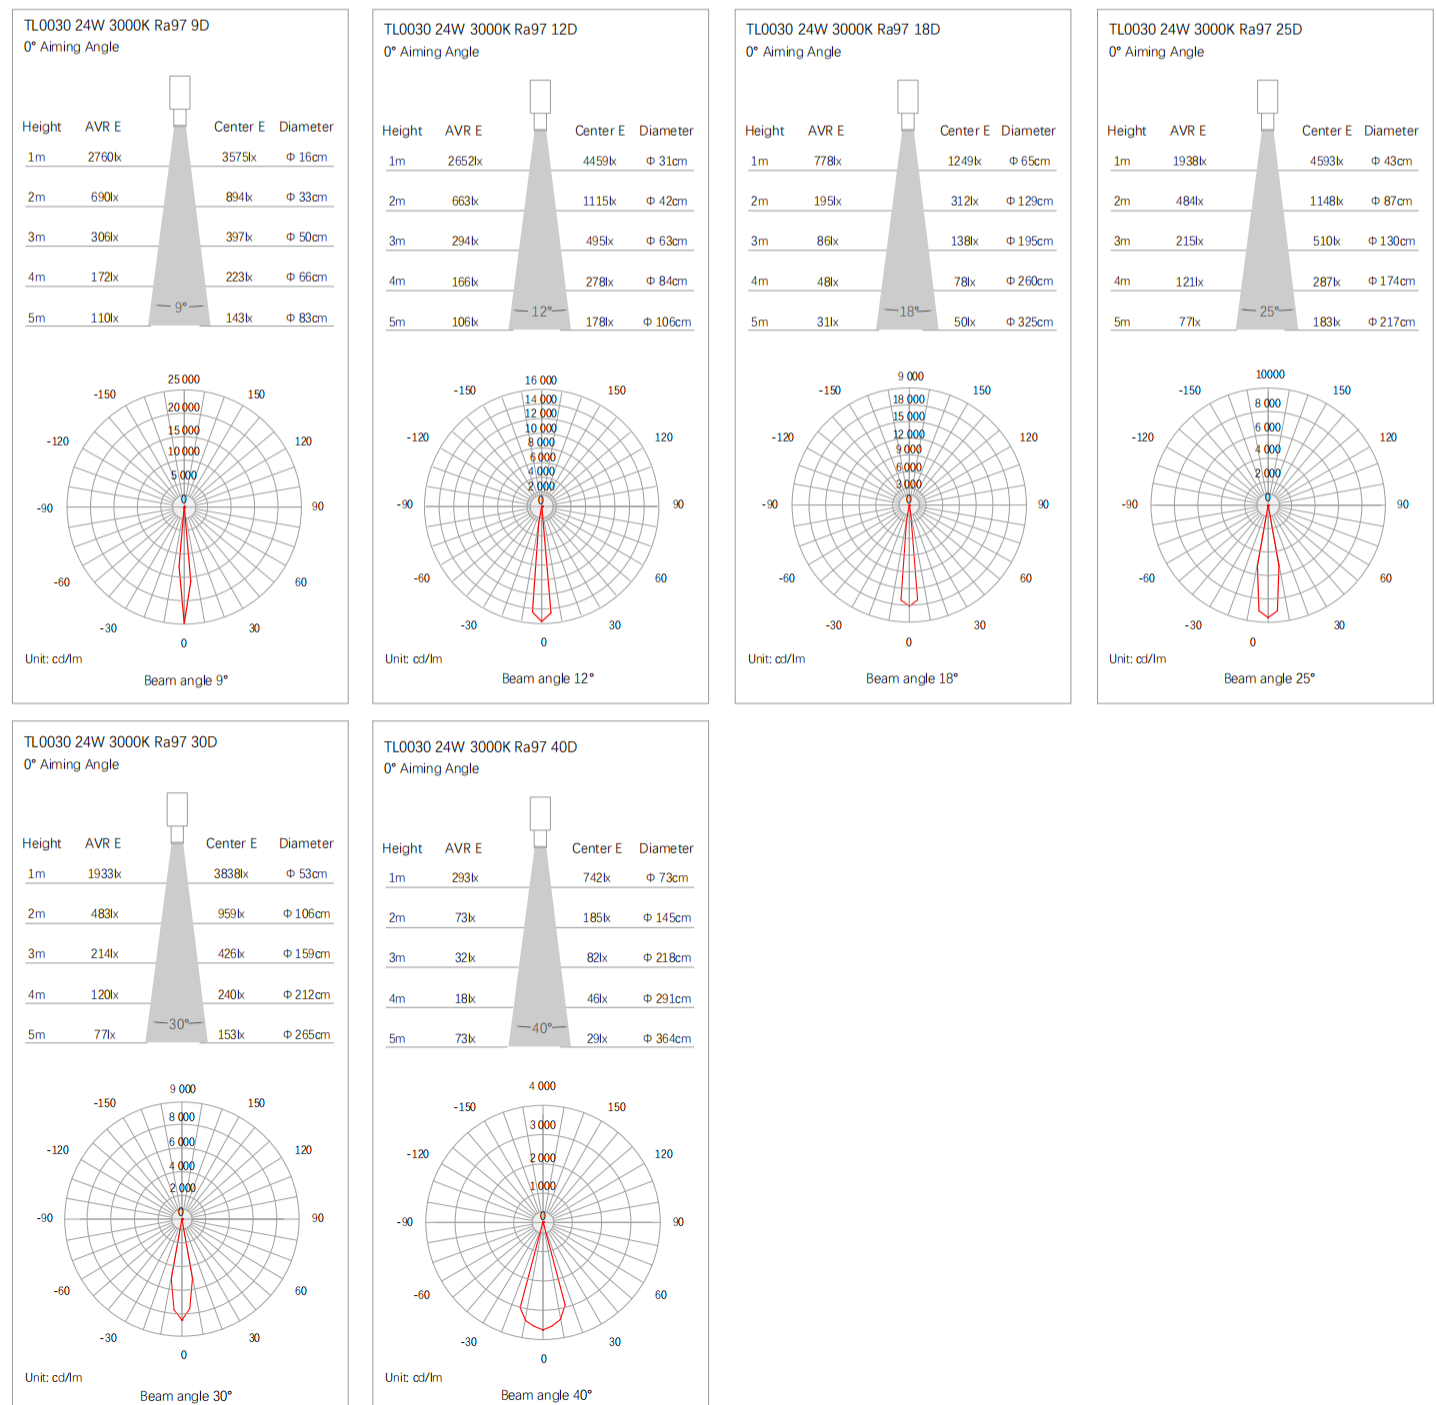


Lighting effect


Cut sheet

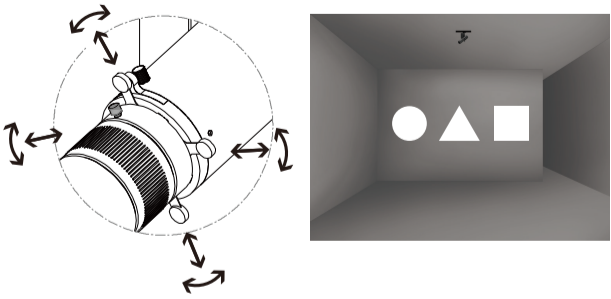

Beam angle adjustable

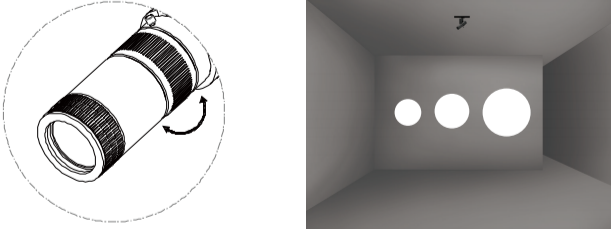


Direction adjustable

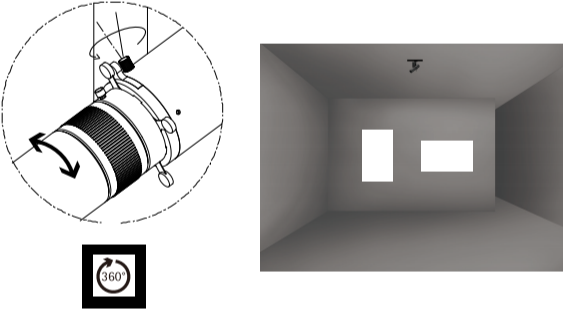


Customized gobo



Sharpness setting

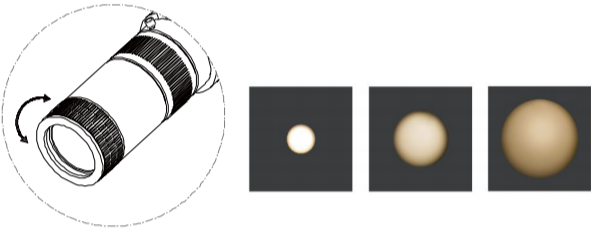

Dimmable

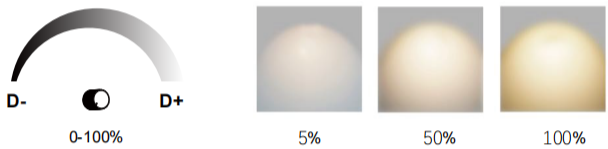

Specifications

Model No.	Total Power (W)	LED Power (W)	Voltage	CRI (Ra)	Color Temp (K)	LED Flux(lm)	Beam Angle	IP Grade
TL0030	24	20.5	AC220-240V	97	2700	2640	9~18° 12~25° 18~30° 24~40°	IP20
				97	3000	2808		
				97	3500	2844		
				97	4000	2880		

• Thermally stable typical lumens (±10%)


Package information

Model No.	Packaging unit	Pieces/Unit	Dimensions (L x W x H)	Gross weight	Volume
TL0030	Inner box	1	305x225x170mm	2.00kg	11.67dm³
	Outer box	4	470x320x435mm	14.00kg	65.42dm³

Compatible accessories



Color coated lens



Ceiling adapter