

PRODUCT INTRODUCTION

V19 Summit, it's the extension of Infinity V19 series, is widely used in articles of luxury, museum, shopping areas, especially in showcase. Superbly mini structure presents the optimal exhibition pieces and the very high color rendering index of CRI98/95 highlights the special features of the items on display. Light is one of the most important factors in this context.

SPECIFICATION


Wattage : 1W
 Color temperature : 2700K / 3000K / 4000K
 CRI : Ra98/95 (R9>90)
 Round distribution : 15° / 27° / 42° / 58°
 Driver : Input voltage DC3V
 Dimming : Non dim , 0/1-10V , DALI , Casambi

FEATURES

Product surface color : Silver, Black, Customized
 Mounting type: Recessed
 Protection degree : IP20 (En60598)
 Energy efficiency: EEIA







Radial distribution & Conical illuminance

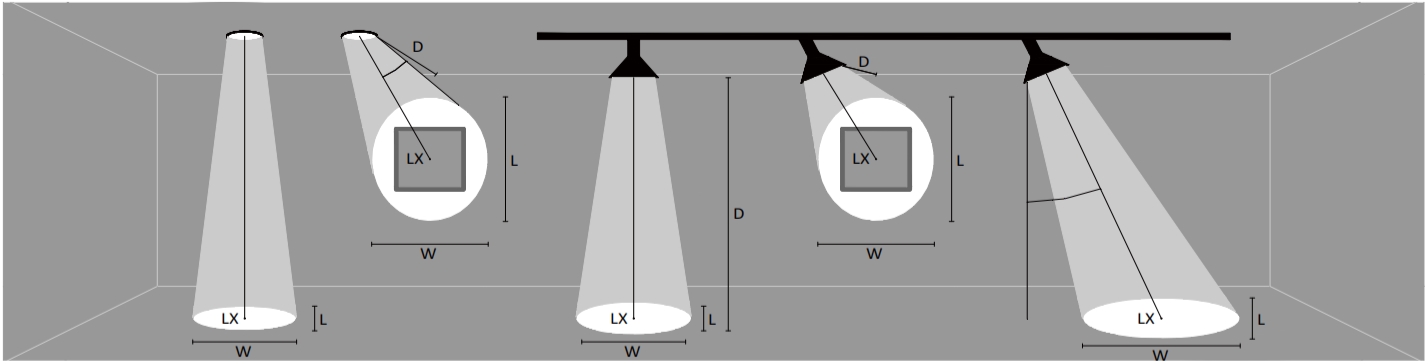

D Distance To Fix From Wall or Floor
LX Initial illuminance Level At Center of Beam
L Beam Length(when candlepower drops to 50% of maximum)
W Beam Width(when candlepower drops to 50% of maximum)

Radial distribution & Conical illuminance

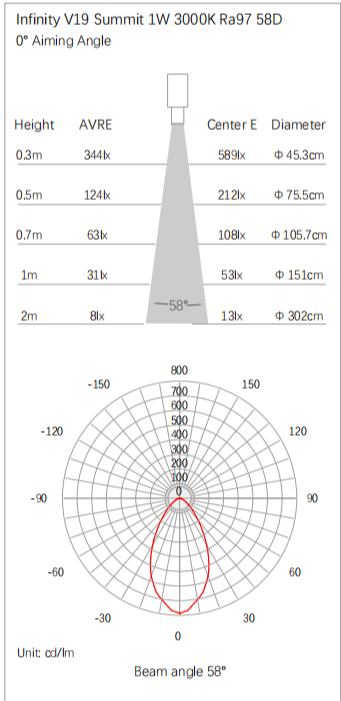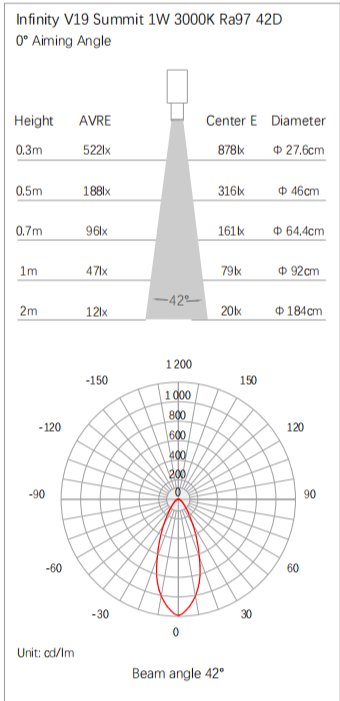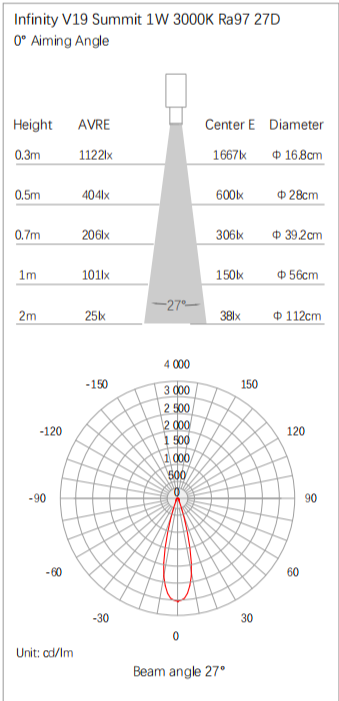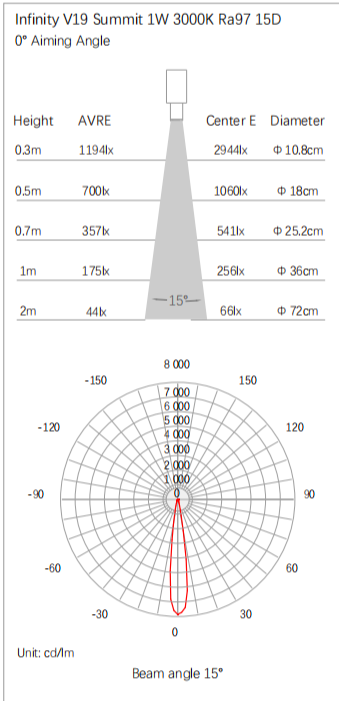

Specifications

Model No.	Total Power (W)	LED Power (W)	Voltage	CRI (Ra)	Color Temp (K)	LED Flux (lm)	Beam Angle	IP Grade
Infinity V19 Summit	1	0.9	DC3V(350MA)	98/95	2700	100	15°/27°/42°/58°	IP20
					3000	110		
					4000	112		

· Thermally stable typical lumens (±10%)

Package information

Model No.	Packaging/Unit	Pieces/Unit	Dimensions (L x W x H)	Gross Weight	Volume
Infinity V19 Summit	Inner box	1	60x60x110mm	0.56kg	0.37dm³
	Outer box	20	330x330x250mm	29.5kg	27.23dm³