

PRODUCT INTRODUCTION

Mondo A15, designed for niches and shelves with a minimum thickness. It creates a softer tone with high CRI ensures true color reproduction. The super thin structure and exquisite finishes make it very suitable for ideal for the application of display and showcases for jewelry or museums.

SPECIFICATION

Wattage : 1W

Color temperature : 2700K / 3000K / 3500K / 4000K

CRI : Ra98/95 (R9>90)

Round distribution : 24°

Driver : Input voltage DC2-4V 350mA(MAX)

Dimming : 0/1-10V , DALI , TRIAC , CASAMBI

FEATURES

Product surface color : Silver, Black, Customized


Adaptor : Recessed

Protection degree : IP20 (En60598)

Energy efficiency: EEIA




Radial distribution & Conical illuminance

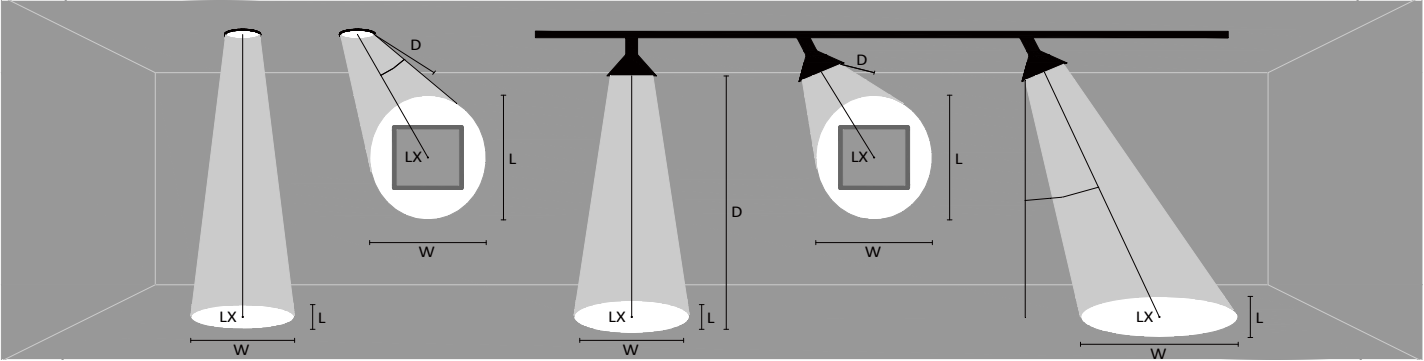

D Distance To Fix From Wall or Floor
LX Initial illuminance Level At Center of Beam
L Beam Length(where candlepower drops to 50% of maximum)
W Beam Width(where candlepower drops to 50% of maximum)

Radial distribution & Conical illuminance

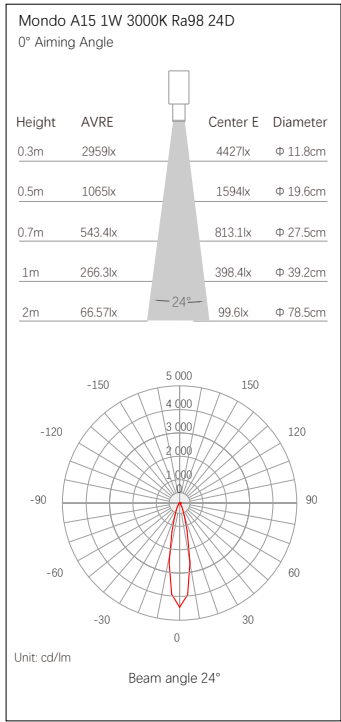

Specifications

Model No.	Total Power (W)	LED Power (W)	Voltage	CRI (Ra)	Color Temp (K)	LED Flux (lm)	Beam Angle	IP Grade
Mondo A15	1	0.9	DC2-4V 350mA(MAX)	98/95	2700	100	24°	IP20
					3000	110		
					3500	110		
					4000	112		

· Thermally stable typical lumens (±10%)

Package information

Model No.	Packaging/Unit	Pieces/Unit	Dimensions (L x W x H)	Gross Weight	Volume
Mondo A15	Inner box	1	40x40x40mm	0.02kg	0.064dm³
	Outer box	100	230x230x200mm	4kg	10.58dm³