



## PRODUCT INTRODUCTION



It features a very high color rendering index of CRI 98/95, which can highlight the special features of the items on display and catch the viewers' attention. With the magnetic installation, the lights can be installed and moved without tools by means of magnetic holders.

## SPECIFICATION


Wattage : 3W / 5W  
 Color temperature : 2700K / 3000K / 4000K  
 CRI : Ra95 (R9>90)  
 Beam angle : 6-45°  
 Adjusted by zoom lens control device  
 Input voltage : DC24V / DC48V  
 Dimming : 0/1-10V , DALI , TRIAC , CASAMBI

## FEATURES




Product surface color : Silver, Black, Customized  
 Rotatable through 365° on adaptor, 90° tilt  
 Adaptor : Magetic  
 Protection degree : IP20 (En60598)  
 Energy efficiency: EEIA

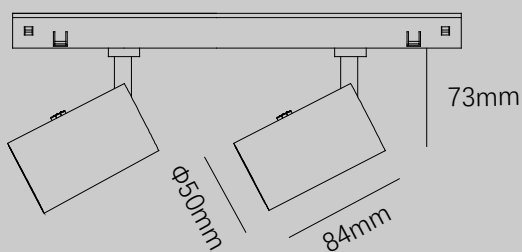


Radial distribution & Conical illuminance

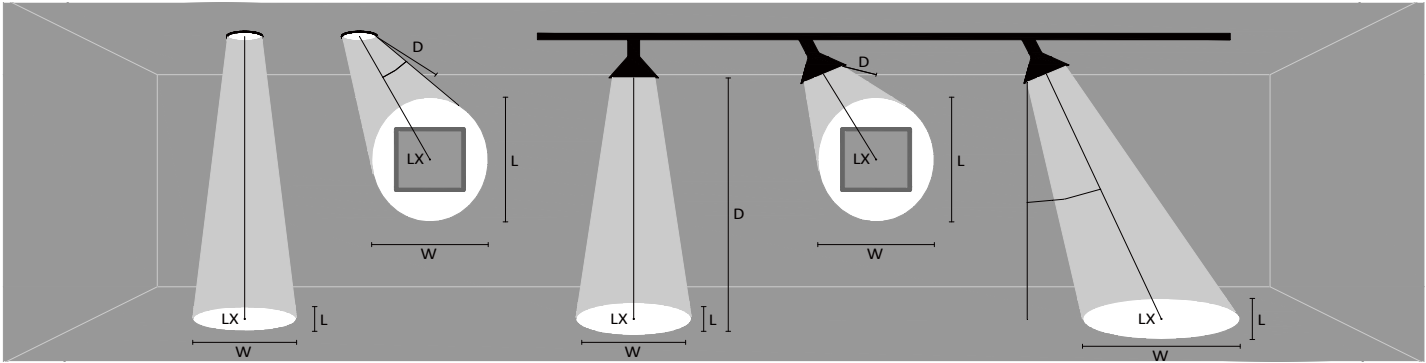


D Distance To Fix From Wall or Floor  
LX Initial illuminance Level At Center of Beam  
L Beam Length (where candlepower drops to 50% of maximum)  
W Beam Width (where candlepower drops to 50% of maximum)

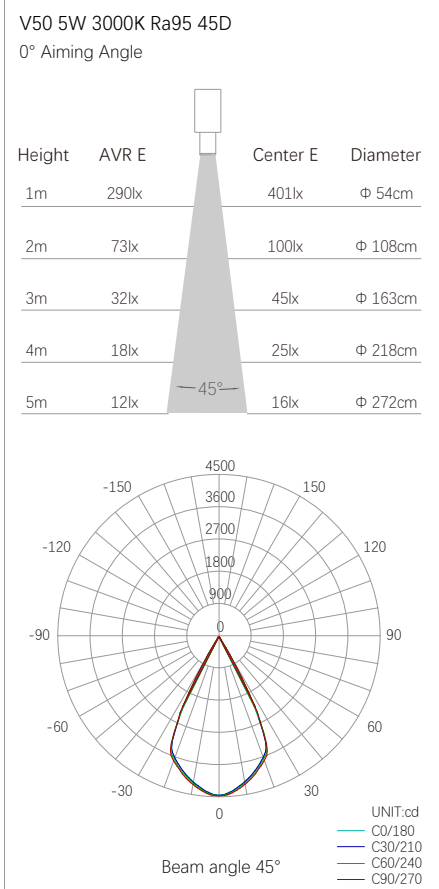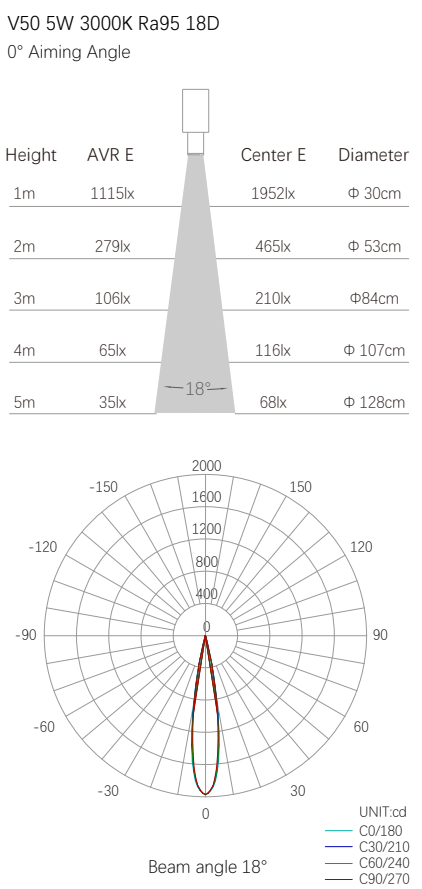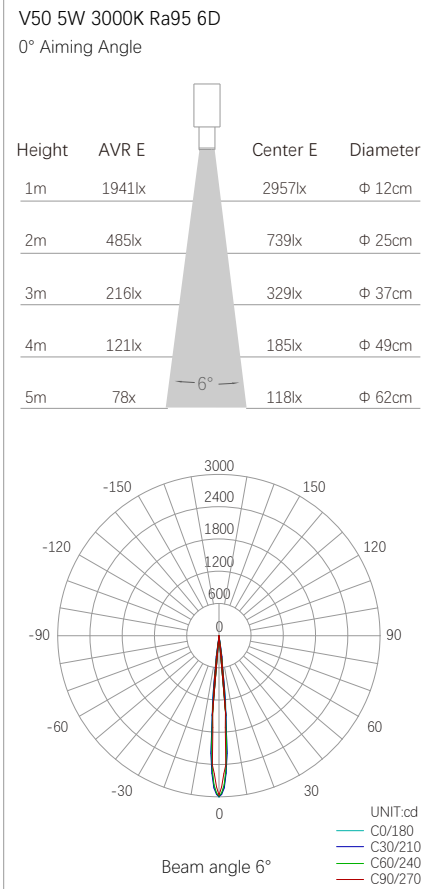

Lighting effect

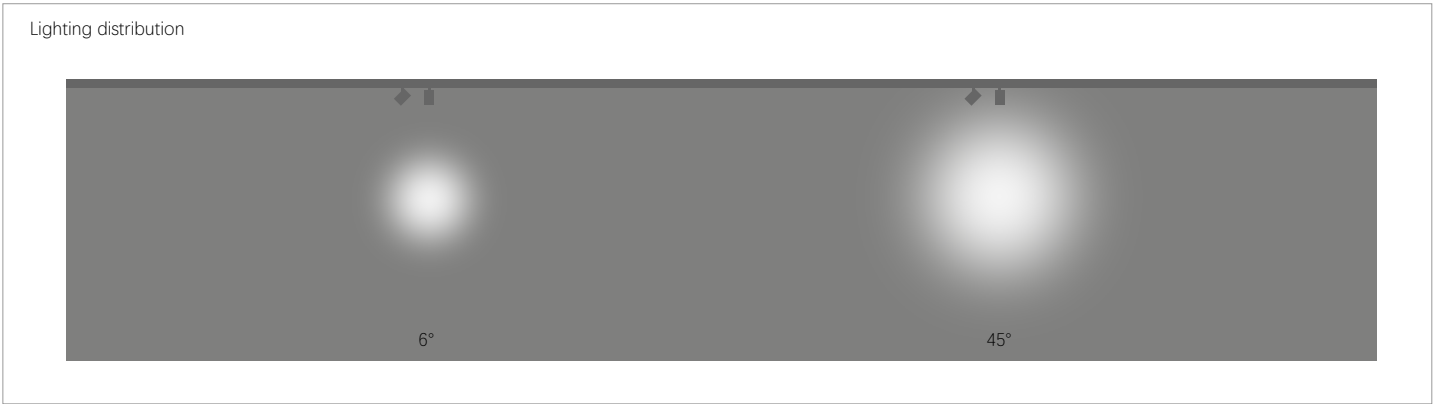

Beam angle adjustable





Specifications


| Model No.                | Total Power (W) | LED Power (W) | Voltage        | CRI (Ra) | Corlor Temp (K) | LED Flux (lm) | Beam Angle | IP Grade |
|--------------------------|-----------------|---------------|----------------|----------|-----------------|---------------|------------|----------|
| Infinity V50 Dou Magetic | 2x3             | 2x2.7         | DC24V<br>DC48V | 95       | 2700            | 400           | 6-45°      | IP20     |
|                          |                 |               |                |          | 3000            | 440           |            |          |
|                          |                 |               |                |          | 4000            | 460           |            |          |
| Infinity V50 Dou Magetic | 2x5             | 2x4.5         |                |          | 2700            | 780           |            |          |
|                          |                 |               |                |          | 3000            | 840           |            |          |
|                          |                 |               |                |          | 4000            | 860           |            |          |

· Thermally stable typical lumens (±10%)

Package information

| Model No.                | Packaging/Unit | Pieces/Unit | Dimensions ( L x W x H ) | Gross Weight | Volume   |
|--------------------------|----------------|-------------|--------------------------|--------------|----------|
| Infinity V28 Dou Magetic | Inner box      | 1           | 150x150x110mm            | 0.4kg        | 2.48dm³  |
|                          | Outer box      | 24          | 620x320x350mm            | 12kg         | 69.44dm³ |

Optional accessories



Honeycomb louver



Color coated lens