


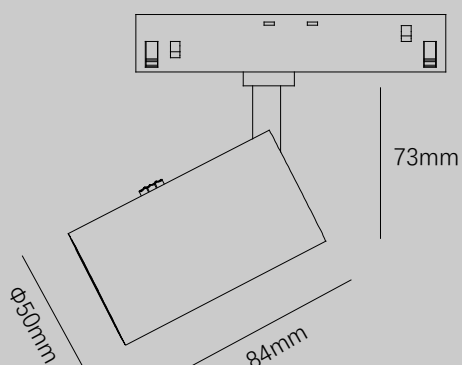

PRODUCT INTRODUCTION


It features a very high color rendering index of CRI 98/95, which can highlight the special features of the items on display and catch the viewers' attention. With the magnetic installation, the lights can be installed and moved without tools by means of magnetic holders.

SPECIFICATION


Wattage : 3W / 5W
 Color temperature : 2700K / 3000K / 4000K
 CRI : Ra95 (R9>90)
 Beam angle : 6-45°
 Adjusted by zoom lens control device
 Input voltage : DC24V / DC48V
 Dimming : 0/1-10V , DALI , TRIAC , CASAMBI

FEATURES

Product surface color : Silver, Black, Customized
 Rotatable through 365° on adaptor, 90° tilt
 Adaptor : Magetic
 Protection degree : IP20 (En60598)
 Energy efficiency: EEIA




Radial distribution & Conical illuminance

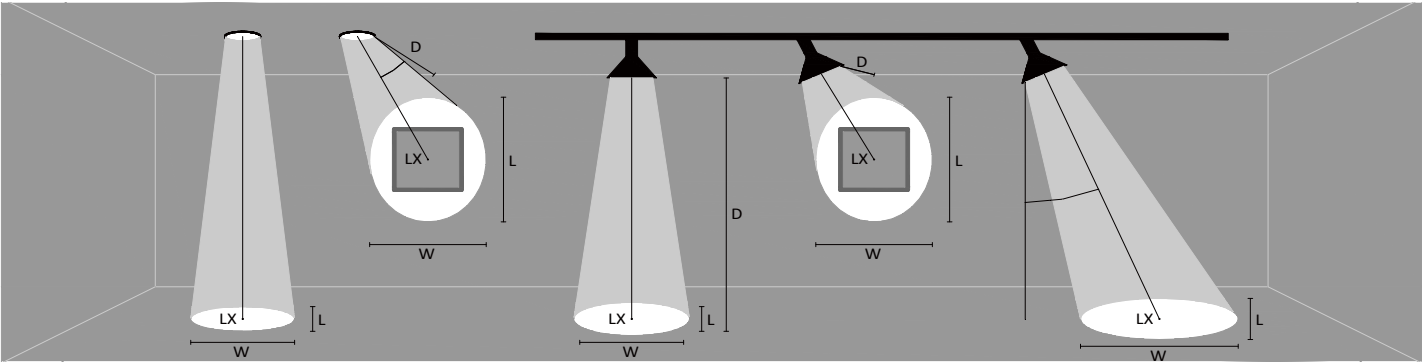

D Distance To Fix From Wall or Floor
LX Initial illuminance Level At Center of Beam
L Beam Length(where candlepower drops to 50% of maximum)
W Beam Width(where candlepower drops to 50% of maximum)


V50 5W 3000K Ra95 6D
0° Aiming Angle

Height	AVR E	Center E	Diameter
1m	1941lx	2957lx	Φ 12cm
2m	485lx	739lx	Φ 25cm
3m	216lx	329lx	Φ 37cm
4m	121lx	185lx	Φ 49cm
5m	78lx	118lx	Φ 62cm

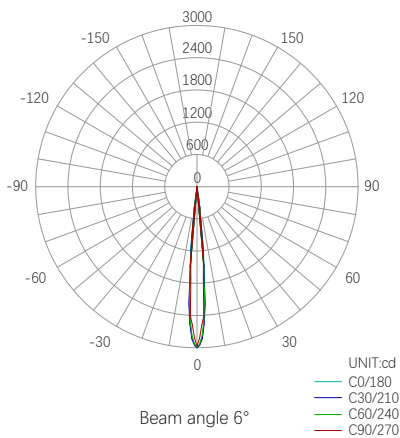


V50 5W 3000K Ra95 18D
0° Aiming Angle

Height	AVR E	Center E	Diameter
1m	1115lx	1952lx	Φ 30cm
2m	279lx	465lx	Φ 53cm
3m	106lx	210lx	Φ 84cm
4m	65lx	116lx	Φ 107cm
5m	35lx	68lx	Φ 128cm

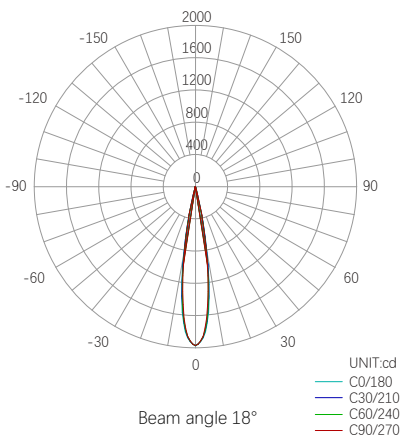

V50 5W 3000K Ra95 45D
0° Aiming Angle

Height	AVR E	Center E	Diameter
1m	290lx	401lx	Φ 54cm
2m	73lx	100lx	Φ 108cm
3m	32lx	45lx	Φ 163cm
4m	18lx	25lx	Φ 218cm
5m	12lx	16lx	Φ 272cm

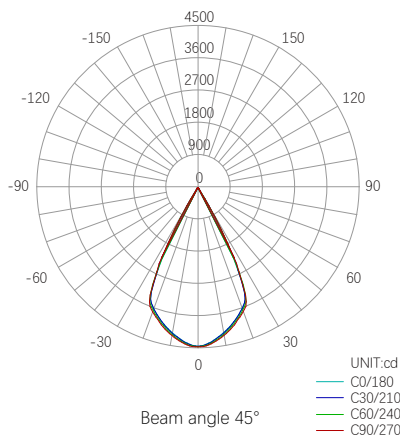


Lighting effect

Lighting distribution



Beam angle adjustable





Specifications


Model No.	Total Power (W)	LED Power (W)	Voltage	CRI (Ra)	Corlor Temp (K)	LED Flux (lm)	Beam Angle	IP Grade
Infinity V50 Magetic	3	2.7	DC24V DC48V	95	2700	200	6-45°	IP20
					3000	220		
					4000	230		
Infinity V50 Magetic	5	4.5			2700	390		
					3000	420		
					4000	430		

· Thermally stable typical lumens (±10%)

Package information

Model No.	Packaging/Unit	Pieces/Unit	Dimensions (L x W x H)	Gross Weight	Volume
Infinity V50 Magetic	Inner box	1	150x150x110mm	0.22kg	2.48dm³
	Outer box	24	620x320x350mm	24kg	69.44dm³

Optional accessories



Honeycomb louver



Color coated lens