

PRODUCT INTRODUCTION

Stream, multiple installation with magnetic, 3-phase track, surfaced and suspended type and various size combinations.

Low voltage magnetic installation is very easy to install, Install in one second and allows it to freely position on the track. Its high color rendering index 98 ensures true color reproduction and meets different design needs with linear light and additional wall wash lighting distribution.

SPECIFICATION

Wattage : 5W(154mm) / 12W(304mm)

Color temperature : 2700K / 3000K / 4000K

CRI : Ra97/95 (R9>90)

Beam angle : 9x80° / 30x90° Asymmetric 15°

Input voltage : DC48V

Dimming : 0/1-10V , DALI , TRIAC , CASAMBI



FEATURES

Product surface color : Silver, Black, Custom


Adaptor : Magnetic

Protection degree : IP20 (En60598)

Energy efficiency: EEIA

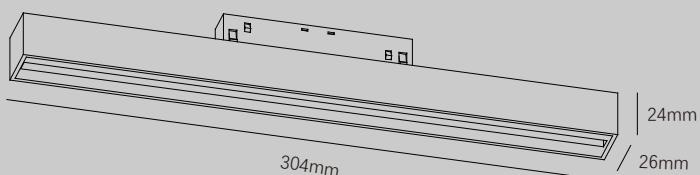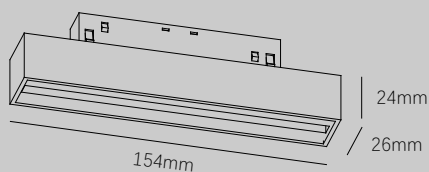

Radial distribution & Conical illuminance

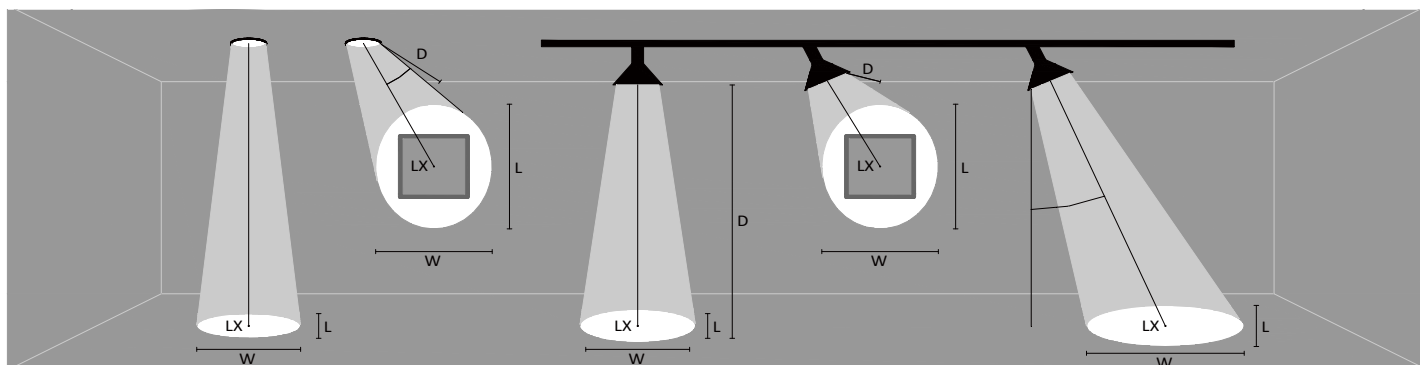


D Distance To Fix From Wall or Floor

LX Initial illuminance Level At Center of Beam

L Beam Length (where candlepower drops to 50% of maximum)

W Beam Width (where candlepower drops to 50% of maximum)


Radial distribution & Conical illuminance

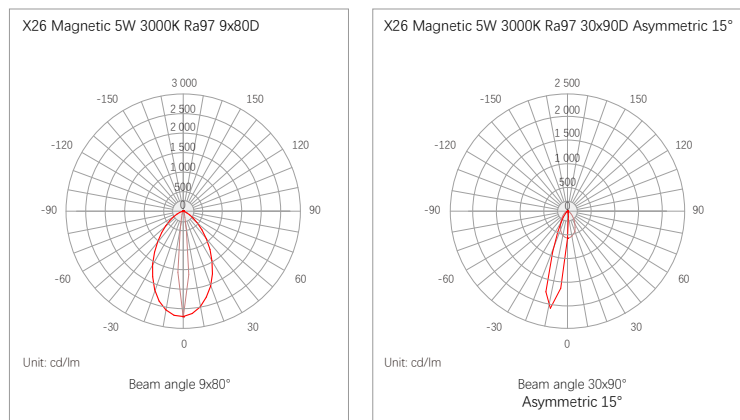

Lighting effect



Strip light distribution

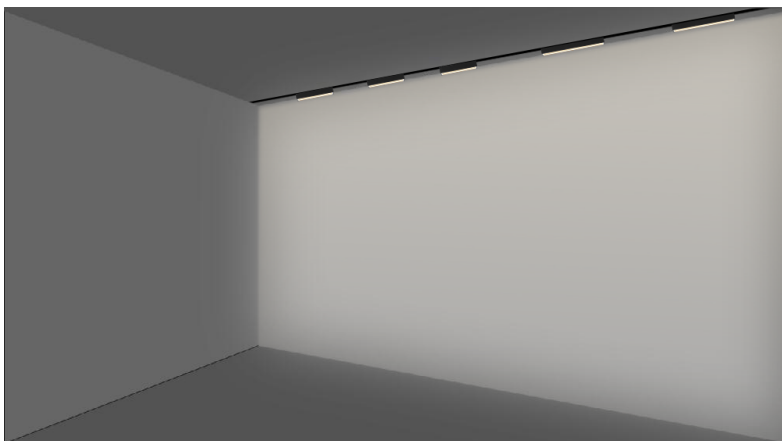

Asymmetric wall wash distribution

Specifications

Model No.	Total Power (W)	LED Power (W)	Voltage	CRI (Ra)	Corlor Temp (K)	LED Flux (lm)	Beam Angle	IP Grade
X26 Magnetic (154mm)	5	4.5	DC48V	97/95	2700	400	9°x80° 30°x90°, Asymmetric: 15°	IP20
					3000	450		
					4000	470		
X26 Magnetic (304mm)	12	10.8	DC48V	97/95	2700	960	9°x80° 30°x90°, Asymmetric: 15°	IP20
					3000	1080		
					4000	1128		

· Thermally stable typical lumens (±10%)

Package information

Model No.	Packaging/Unit	Pieces/Unit	Dimensions (L x W x H)	Gross Weight	Volume
Stream X26 Magnetic (154mm)	Inner box	1	210x75x65mm	0.30kg	1.02dm³
	Outer box	50	440x400x350mm	16.00kg	61.60dm³
Stream X26 Magnetic (304mm)	Inner box	1	360x75x65mm	0.60kg	1.75dm³
	Outer box	25	380x400x350mm	16.00kg	53.20dm³

Compatible accessories



Color coated lens